



# DIRIS A-30/A-41

Multifunction performance metering & monitoring device - PMD  
Energy monitoring

Single-circuit metering,  
measurement &  
analysis



## Function

The DIRIS A-30 and A-41 are performance metering & monitoring devices that provide the user with all of the measurements needed to complete energy efficiency projects and to assure the monitoring of electrical distribution.

All of this information can be used and analysed remotely using energy efficiency software packages.

## Advantages

### User-friendly operation

With its large backlit multiple-display screen with 6 hot keys, the DIRIS A-30 is easy to use.

### detects wiring errors.


The DIRIS A-30 is provided with a correction function for TC wiring errors.

### Customisable

The DIRIS A-30 can be equipped with additional modules that give the user flexibility throughout the service life of the product.

Communication modules and additional digital or analogue inputs/outputs can be used to increase its range of functionality.

## Functional diagram

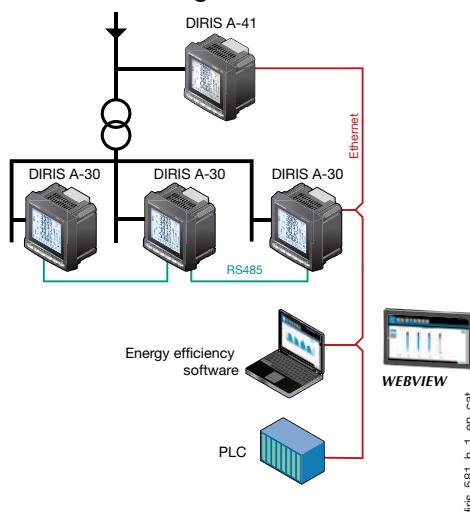

## Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and tertiary applications.

## The solution for

- > Industry
- > Building
- > Infrastructures



## Strong points

- > User-friendly operation
- > Detects wiring errors.
- > Customisable
- > Web server function
- > Compliant with IEC 61557-12

## Compliance with standards

- > IEC 61557-12
- > IEC 62053-22 class 0.5 S
- > IEC 62053-23 class 2
- > UL



## Functions

### Multi-measurement

- Currents
  - instantaneous: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>, I<sub>system</sub>
  - average/max average: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>
- Voltages & frequency
  - instantaneous: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F, V<sub>system</sub>, U<sub>system</sub>
  - average/max average: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F
- Powers
  - instantaneous: 3P,  $\Sigma$ P, 3Q,  $\Sigma$ Q, 3S,  $\Sigma$ S
  - max average:  $\Sigma$ P,  $\Sigma$ Q,  $\Sigma$ S
  - predictive: ( $\Sigma$ P), ( $\Sigma$ Q), ( $\Sigma$ S)
- Power factors
  - instantaneous: 3PF,  $\Sigma$ PF
  - average/max average:  $\Sigma$ PF

### Kfactor

- Temperatures <sup>(1)</sup>
  - internal
  - external via 3 PT100 probes

### Metering

- Active energy: +/- kWh
- Reactive energy: +/- kvarh
- Effective power: kWh
- Timetable:

### Harmonic analysis

- Level of harmonic distortion
- Currents: thd I<sub>1</sub>, thd I<sub>2</sub>, thd I<sub>3</sub>, thd I<sub>n</sub>
- Phase-to-neutral voltage: thd V<sub>1</sub>, thd V<sub>2</sub>, thd V<sub>3</sub>
- Phase-to-phase voltage: thd U<sub>12</sub>, thd U<sub>23</sub>, thd U<sub>31</sub>

### Individual readings up to 63rd level

- Currents: H<sub>11</sub>, H<sub>12</sub>, H<sub>13</sub>, H<sub>ln</sub>
- Phase-to-neutral voltage: HV<sub>1</sub>, HV<sub>2</sub>, HV<sub>3</sub>,
- Composed voltages: HU<sub>12</sub>, HU<sub>23</sub>, HU<sub>31</sub>

### Load curve <sup>(1)</sup>

- Active & reactive power:  $\Sigma$ P +/- ;  $\Sigma$ Q +/-
- Voltages & frequency: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F

### Events <sup>(1)</sup>

- Alarms on all electrical parameters.

### Communications <sup>(1)</sup>

- RS485 (Modbus & Profibus-DP)
- Ethernet (Modbus/TCP or Modbus RTU over TCP and Web server)
- Ethernet with RS485 Modbus RTU gateway over TCP

### Inputs/ Outputs <sup>(1)</sup>

- Pulse counting
- Checking / control of equipment items
- Alarm report
- Pulse report

### Analogue output

- Analogue 0/4- 20 mA

<sup>(1)</sup> Available as an option  
(see following pages).

## Front panel



1. Backlit LCD display
2. Pushbutton for currents and for connection correction function
3. Pushbutton for voltages and frequency.
4. Pushbutton for active, reactive and effective powers and for power factor.
5. Pushbutton for maximum and average values for currents and power levels.
6. Pushbutton for harmonics.
7. Pushbutton for electrical energy meters, timers and impulse counters

## Integratable modules

## DIRIS® A-30



## DIRIS® A-41\*



\* With current measurement module for Neutral as standard.



## Pulse outputs

2 configurable pulse outputs (type, weight and run) on  $\pm \text{kWh}$ ,  $\pm \text{kvarh}$  and  $\text{kVAh}$ .



## MODBUS® communication

RS485 link with MODBUS® protocol (speed up to 38400 baud).



## Analogue outputs

You can connect a maximum of 2 modules, i.e. 4 analogue outputs.

2 outputs can be allocated to:

3I, In, 3V, 3U, F,  $\pm \Sigma P$ ,  $\pm \Sigma Q$ ,  $\Sigma S$ ,  $\Sigma PFL/C$ , I sys, Vsyst, Usyst, Ppred, Q pred, Spred,  $T^\circ\text{C}$  internal,  $T^\circ\text{C} 1$ ,  $T^\circ\text{C} 2$ ,  $T^\circ\text{C} 3$  and to 30 VDC power supply.



## 2 inputs - 2 outputs

You can connect a maximum of 3 modules, i.e. 6 inputs / 6 outputs.

2 outputs can be allocated to:

- monitoring: 3I, In, 3V, 3U, F,  $\pm \Sigma P$ ,  $\pm \Sigma Q$ ,  $\Sigma S$ ,  $\Sigma PFL/C$ , THD 3I, THD In, THD 3V, THD 3U, Ppred, Qpred, Spred,  $T^\circ\text{C}$  internal,  $T^\circ\text{C} 1$ ,  $T^\circ\text{C} 2$ ,  $T^\circ\text{C} 3$  and of time counter,
- remote control,
- timed remote control,
- 2 inputs for pulse counting.



## Storage capability

- Memory function up to max. 62 days for P+, P-, Q+, Q- with a TOP for internal or external synchronisation of 5, 8, 10, 15, 20, 30 and 60 minutes.
- Memory function for the last 10 timed and dated alarms.
- Memory function for the last min and max instantaneous values for 3U, 3V, 3I, In, F,  $\Sigma P \pm$ ,  $\Sigma Q \pm$ ,  $\Sigma S$ , THD 3U, THD 3V, THD 3U, THD 3V, THD 3I, THD In.
- Memory function of average values 3U, 3V and F as a function of synchronisation (maximum 60 days).



## Ethernet communication

- Ethernet link with MODBUS/TCP or MODBUS RTU over TCP.
- Integrated web server function<sup>(1)</sup>.



## Ethernet communication with RS485 MODBUS gateway

- Ethernet link with MODBUS/TCP or MODBUS RTU over TCP.
- Connect 1 to 247 RS485 MODBUS slaves.
- Integrated webserver function<sup>(1)</sup>.

# DIRIS A-30/A-41

Multifunction performance metering & monitoring device - PMD  
Energy monitoring

## Accessories


Current transformer  
(see page 488)

IP65 protection.



## Terminals


### DIRIS A-30

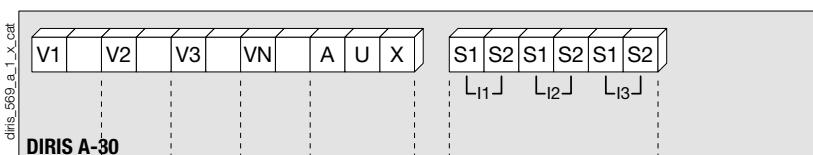

S1 - S2: current inputs

AUX: auxiliary power supplies U<sub>s</sub>  
V1 - V2 - V3 - VN: voltage inputs


### DIRIS A-41

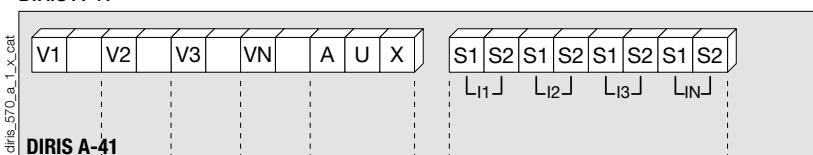

S1 - S2: current inputs

AUX: auxiliary power supplies U<sub>s</sub>  
V1 - V2 - V3 - VN: voltage inputs


### Communication module

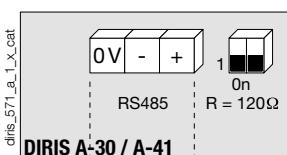

RS485 link.

R = 120 Ω : internal resistance for the RS485 link.


### Pulse output module

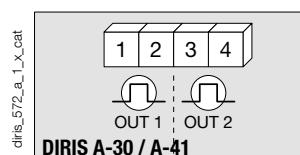

1 - 2: pulse output n°1.

3 - 4: relay output n°2.


### Analogue output module

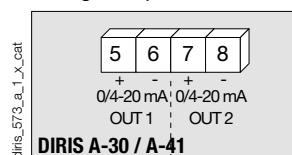

5 - 6: analogue output n°1.

7 - 8: analogue output n°2.

### 2 input / 2 output module

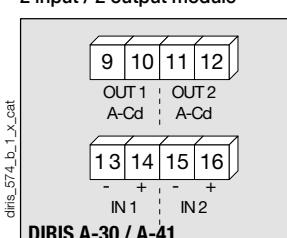


9 - 10: relay output n°1.

11 - 12: relay output n°2.

13 - 14: optical input n°1.


15 - 16: optical input n°2.

### Memory module

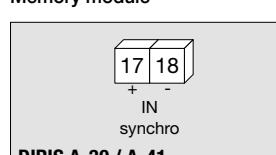

17 - 18: synchronisation input.

### Temperature module

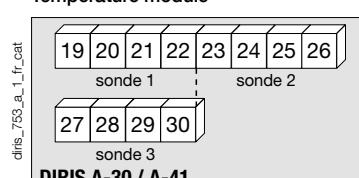

Probe 1      Probe 2      Probe 3


19: red      23: red      27: red

20: red      24: red      28: red


21: white      25: white      29: white

22: white      26: white      30: white

### Ethernet module



### Ethernet module + RS485 MODBUS gateway

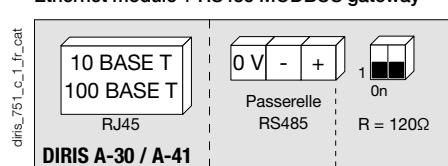

## Electrical characteristics

<b>Measurement of currents on insulated inputs (TRMS)</b>	
Via CT primary	9,999 A
Via CT secondary	1 or 5 A
Measurement range	0 ... 11 kA
Input consumption	≤ 0,1 VA
Measurement updating period	1 s
Accuracy	0.2%
Permanent overload	6 A
Intermittent overload	10 I <sub>n</sub> for 1 s
<b>Voltage measurements (TRMS)</b>	
Direct measurement between phases	50 to 500 VAC
Direct measurement between phase and neutral	28 to 289 VAC
VT primary measurement	500,000 VAC
VT secondary measurement	60, 100, 110, 173, 190 VAC
Frequency	50 / 60 Hz
Input consumption	≤ 0,1 VA
Measurement updating period	1 s
Accuracy	0.2%
<b>Current - voltage product</b>	
Limitation for TC 1 A	10,000,000
Limitation for TC 5 A	10,000,000
<b>Power measurement</b>	
Measurement updating period	1 s
Accuracy	0.5%
<b>Power factor measurement</b>	
Measurement updating period	1 s
Accuracy	0.5%
<b>Frequency measurement</b>	
Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Accuracy	0.1%
<b>Energy accuracy</b>	
Active (according to IEC 62053-22)	Class 0.5 S
Reactive (according to IEC 62053-23)	Class 2
<b>Auxiliary power supply</b>	
Alternative voltage	110 ... 400 VAC
AC tolerance	± 10 %
Direct current	120 ... 350 VDC / 12 ... 48 VDC
DC tolerance	± 20 % / - 6 ... + 20 %
Frequency	50 / 60 Hz
Power consumption	≤ 10 VA


<b>Module 2 inputs - 2 outputs: outputs (alarms / control)</b>	
Number of relays	2 <sup>(1)</sup>
Type	250 VAC - 5 A - 1150 VA
<b>Module 2 inputs - 2 outputs: optical coupler inputs</b>	
Number	2 <sup>(1)</sup>
Power supply	10 ... 30 VDC
Minimum width of signal	10 ms
Minimum length between 2 pulses	18 ms
Type	Optical couplers
<b>Pulse output module</b>	
Number of relays	2
Type	100 VDC - 0.5 A - 10 VA
Max. number of manoeuvres	≤ 10 <sup>8</sup>
<b>Analogue output module</b>	
Number of outputs	2 <sup>(2)</sup>
Type	Insulated
Scale	0 / 4 ... 20 mA
Load resistance	600 Ω
Maximum current	30 mA
<b>MODBUS communication module</b>	
Link	RS485
Type	2 to 3 half duplex wires
Protocol	MODBUS® RTU
MODBUS® speed	4800 to 38400 baud
<b>PROFIBUS DP communication module</b>	
Link	SUB-D9
Protocol	PROFIBUS® DP
PROFIBUS® speed	9.8 kbaud ... 12 Mbaud
<b>Ethernet communication module</b>	
Connection technology	RJ45
Baud rate	10 base T / 100 base T
Protocol	MODBUS TCP or MODBUS RTU on TCP
<b>Temperature module (inputs)</b>	
Type	PT100
Connection	2, 3 or 4 wires
Dynamic	- 20°C ... 150°C
Accuracy	± 1 digit
Maximum length	300 cm
<b>Operating conditions</b>	
Operating temperature range	-10 to +55°C
Storage temperature	-20 to 85°C
Relative humidity	95%

(1) Max. 3 modules / DIRIS.

(2) Max. 2 modules / DIRIS.

## Case

diris\_582\_f\_1\_x\_cat

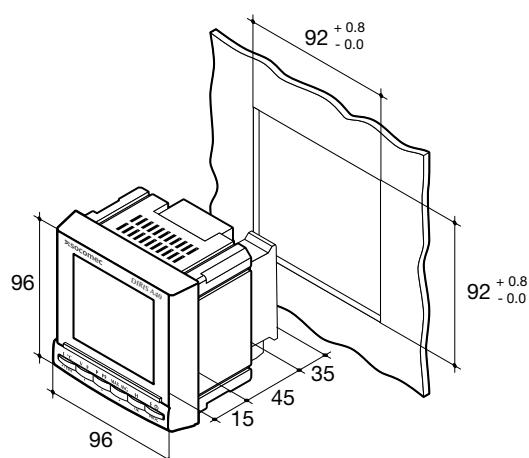

Type	Integratable
Dimensions W x H x D	96 x 96 x 60 mm
Case degree of protection	IP30
Front degree of protection	IP52
Display type	Backlit LCD display
Type of terminal strips	Fixed or detachable
Section of connection for voltages and other terminals	0,2 ... 2,5 mm <sup>2</sup>
Section of connection for currents	0,5 ... 6 mm <sup>2</sup>
Weight	400 g

# DIRIS A-30/A-41

Multifunction performance metering & monitoring device - PMD

Energy monitoring


## Connections

### Balanced low-voltage network for DIRIS A-30

**Recommendation:** When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PTI, which can be found in the SOCOMEC catalogue: please consult us.

In TNC mode, it is advisable to connect the DIRIS A-30/A-41 to earth using the functional earth module.


#### 3/4 wires with 1 CTs

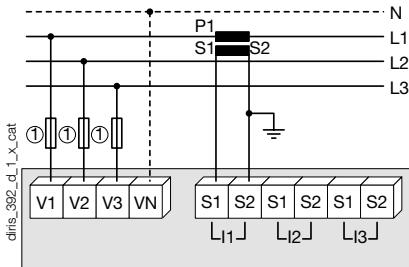

The use of 1 TC reduces by 0.5% the accuracy of the phases, the current for which is worked out by vector calculation.


1. 0.5 A gG / 0.5 A class CC fuses.

#### Single-phase

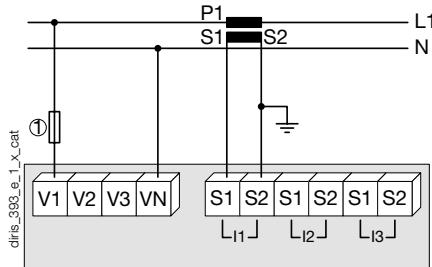

1. 0.5 A gG / 0.5 A class CC fuses.


#### Two-phase

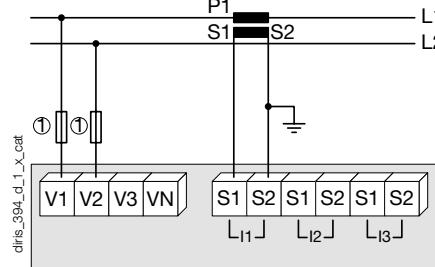

1. 0.5 A gG / 0.5 A class CC fuses.


### Balanced low-voltage network for DIRIS A-30

#### 3/4 wires with 3 CTs

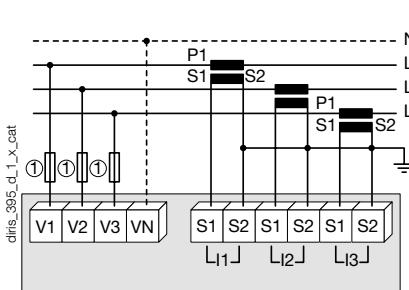

1. 0.5 A gG / 0.5 A class CC fuses.


#### 3 wires with 2 CTs

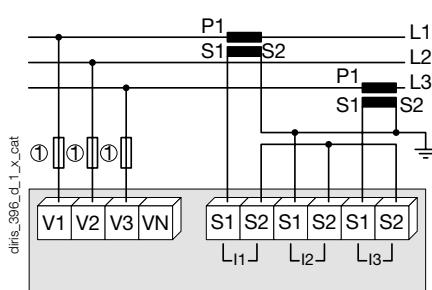

The use of 2 TC reduces by 0.5% the accuracy of the phase, the current for which is worked out by vector calculation.

1. 0.5 A gG / 0.5 A class CC fuses.

#### 3 wires with 2 CTs

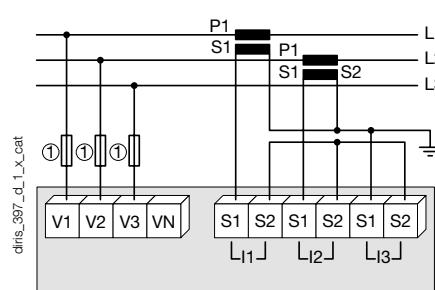


The use of 2 TC reduces by 0.5% the accuracy of the phase, the current for which is worked out by vector calculation.

1. 0.5 A gG / 0.5 A class CC fuses.

### Balanced low-voltage network for DIRIS A-41


#### 4 wires with 4 CTs

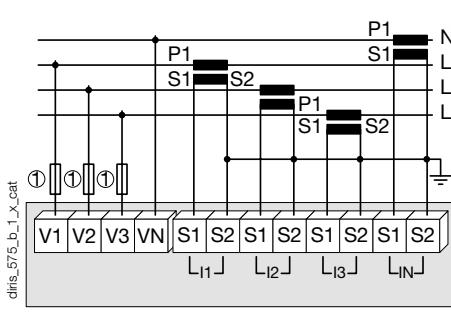


1. 0.5 A gG / 0.5 A class CC fuses.

## Additional information


### Communication via RS485 link

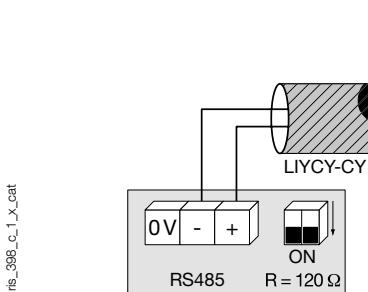

### Connection of potential transformer for HV networks

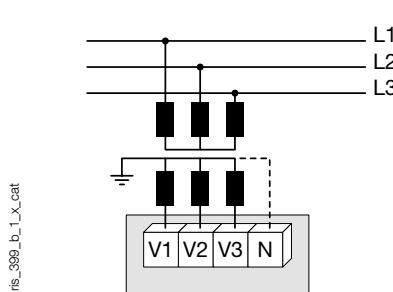

### AC and DC auxiliary power supply

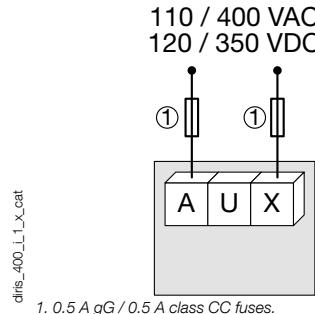

1. 0.5 A gG / 0.5 A class CC fuses.

## References

Basic device	DIRIS A-30		DIRIS A-41 With TC on the neutral Reference
<b>Auxiliary power supply <math>U_s</math></b>			
110 ... 400 VAC / 120 ... 350 VDC	4825 0403		4825 0404
12 ... 48 VDC	4825 0405		4825 0406

Options	Part number		Reference
<b>Integratable modules<sup>(1)</sup></b>			
Pulse outputs	4825 0090		4825 0090
RS485 MODBUS® communication	4825 0092		4825 0092
Analogue outputs	4825 0093		4825 0093
2 inputs - 2 outputs	4825 0094		4825 0094
Storage capability	4825 0097		4825 0097
Ethernet communication (integrated web server function) <sup>(2)</sup>	4825 0203		4825 0203
Ethernet communication + RS485 gateway (integrated web server function) <sup>(2)</sup>	4825 0204		4825 0204
Temperature inputs.	4825 0206		4825 0206

(1) Ease of integration of additional functions (maximum 4 placements on A-30 and 3 on A-41).

(2) Dimensions: 2 placements.

Accessories	To be ordered in multiples of	Part number	To be ordered in multiples of	Part number
Accessories				
IP65 protection.	1	4825 0089	1	4825 0089
Integration kit for 144 x 96 mm cutout	1	4825 0088	1	4825 0088
Fuse circuit breakers to protect voltage inputs (type RM) 3 pole	4	5601 0018	4	5601 0018
Fuse circuit breakers to protect the auxiliary power supply (type RM) 1 pole + neutral	6	5601 0017	6	5601 0017
gG 10x38 0.5 A fuses	10	6012 0000	10	6012 0000
Range of current transformers	1	See page 488.	1	See page 488.
Ferrite for use with communication modules	1	4899 0011		4899 0011
PT100 temperature probe, M6 screw	1	4825 0208	1	4825 0208
PT100 temperature probe, M6 lug	1	4825 0209	1	4825 0209
Associated DIRIS software				See page 530.

## Expert Services

- Study, definition , advice, implementation , maintenance and training ...  
Our experts "Expert Services" offer complete support for the success of your project.

