

RI-CT110 Series



Single Phase Moulded Case Current Transformers

- From 400A to 2000A Primary currents
- 5A or 1A Secondary output
- 100mm width
- 60 x 30mm, 80 x 10mm, 50 x 50mm or Ø60mm cable aperture
- Sealable terminal cover
- Supplied with DIN Rail mounting clip, Busbar fixing and mounting feet
- Compact design
- Indication of primary current flow (arrows on case body)

Ø 60mm

60 x 30mm

80 x 10mm

50 x 50mm

Product Description

The RI-CT110 Series forms part of a large family of solid core single phase moulded case current transformers from Rayleigh Instruments.

These transformers are suitable for monitoring current flow in commercial, industrial or utility applications. They are designed to connect any standard metering or relay product requiring a 5A or 1A output and are available with Primary current input ranges from 400A to 2000A

The RI-CT110 Series have been designed for ease of installation and are supplied with DIN rail clip, Busbar fixings and fixing feet. They also have clear markings moulded into the case to indicate the correct direction of primary current flow to minimise installation errors.

Parameters

Primary Current	Burden			Order Code
	Class 0.5 VA	Class 1 VA	Class 3 VA	
400	7.5	10	15	0400
500	7.5	10	15	0500
600	7.5	10	15	0600
800	10	15	20	0800
1000	10	15	20	1000
1200	10	15	20	1200
1250	10	15	20	1250
1500	15	20	25	1500
1600	15	20	25	1600
2000	15	20	25	2000

Available with 5A or 1A Secondary

Rated Standard

Rated Primary Current (I_{pr})	400...2000A
Frequency Range (f_R)	47...63Hz
Rated continuous over current	1.2 x rated current
Rated short time thermal current (I_{th})	<60 I_n
Rated dynamic current (I_{dyn})	2.5 I_{th}
Instrument security factor (FS)	≤5
Rated Secondary output (V_{st})	5A or 1A
Accuracy class	Class 0.5, 1 and 3 to IEC/EN61869-2

Insulation

Insulation type	Dry transformer, air insulation
Highest voltage U_m	0.72kV r.m.s.
Rated insulation level	3kV r.m.s. 50Hz/1 min

Environmental Conditions

Reference temperature	23°C ±1°C
Nominal temperature range	-25°C...50°C
Daily mean temperature	≤30°C
Limit temperature range for storage	-40°C...85°C
Relative humidity	≤85% non condensing


Housing

Housing material	Self extinguishing polycarbonate
Protection degree (IEC/EN60529)	IP40 housing, Terminals IP20
Mounting	Foot mounting, busbar mounting or snap on 35mm DIN rail mounting
Weight	≤650g

Connections

Primary winding	Passing cable
Secondary winding	Screw clamp connection - 6mm ² Max.

Dimensions (mm)

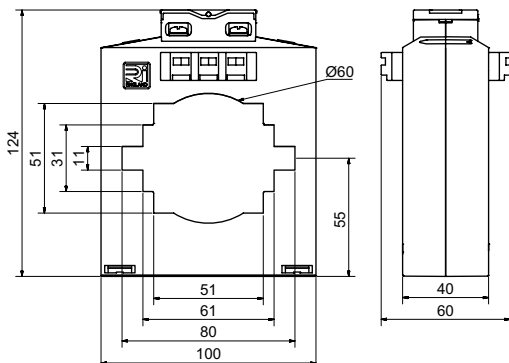

Accessories

The RI-CT110 series of current transformers come supplied with fixing feet and busbar clamping screws.



Information Required with Order

Build your order number - example	RI-CT110 5A 2000
Model	
Secondary Current	
Primary Current Range - See Parameters Table 'Order Code'	