



Energy Division

## 3-in-1 Current Transformers

A range of 3-in-1 current transformers combine three traditional current transformers in one moulded case. 3-in-1 current transformers can be directly installed next to a three-phase moulded case circuit breaker, thus saving installation time where fitting three standard individual current transformers would be required. The M3N1 range of current transformers offers primary currents between 60-630A with 5A secondaries with up to class 0.5 accuracy performance.

### Specifications

System voltage	720V maximum
Test voltage	3kV for 1 minute
System frequency	50Hz or 60Hz
Primary ratings	60A to 630A
Short circuit thermal current	60 x rated primary current (Ith): for 1 sec
Overload withstand	1.2 x rated current continuously
Rated dynamic current	= 2.55 x Iht
Secondary terminals	M4 screw terminals
Enclosure	Flame retardant grade classified UL 94V-O
Aperture holes centres	25, 35, 45mm
Operating temperature	-20°C to +85°C
Accuracy	Class 0.5, 1, 3
Mounting hardware	Plug-in metal feet for wall or base mounting Busbar and DIN-rail mounting
Compliant with	IEC/EN 60044-1

### Features

- Cost effective three-phase moulded case
- Ratio's ranging from 60/5 to 630/5
- Integrated wire sealable terminal cover
- Busbar, DIN-rail and metal feet mounting hardware supplied
- Combined M4 posi/slot screw

### Benefits

- Isolated output for safety
- Faster installation
- Compact size
- Ex-stock delivery

### Applications

- Switchgear
- Distribution systems
- Generator sets
- Control panels

 **Tyco Electronics**


Our commitment. Your advantage.

## Product codes

Part number	Ratio	Burden VA against class Index			Aperture (mm)
		Class 0.5	Class 1	Class 3	
M3N1-25-60/5	60/5	-	1	2	3 @ 15 x 25mm
M3N1-25-100/5	100/5	-	1.5	2.5	3 @ 15 x 25mm
M3N1-25-125/5	125/5	-	1.5	2.5	3 @ 15 x 25mm
M3N1-25-150/5	150/5	1.5	1.5	2.5	3 @ 15 x 25mm
M3N1-25-160/5	160/5	1.5	1.5	2.5	3 @ 15 x 25mm
M3N1-35-100/5	100/5	-	1.5	2	3 @ 21 x 25mm
M3N1-35-125/5	125/5	-	1.5	2.5	3 @ 21 x 25mm
M3N1-35-150/5	150/5	-	1.5	2.5	3 @ 21 x 25mm
M3N1-35-160/5	160/5	1.5	1.5	2.5	3 @ 21 x 25mm
M3N1-35-200/5	200/5	1.5	1.5	2.5	3 @ 21 x 25mm
M3N1-35-250/5	250/5	1.5	1.5	2.5	3 @ 21 x 25mm
M3N1-45-250/5	250/5	1.5	1.5	2.5	3 @ 31 x 31mm
M3N1-45-300/5	300/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-400/5	400/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-500/5	500/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-600/5	600/5	2.5	2.5	3.75	3 @ 31 x 31mm
M3N1-45-630/5	630/5	2.5	2.5	3.75	3 @ 31 x 31mm



## Dimensions

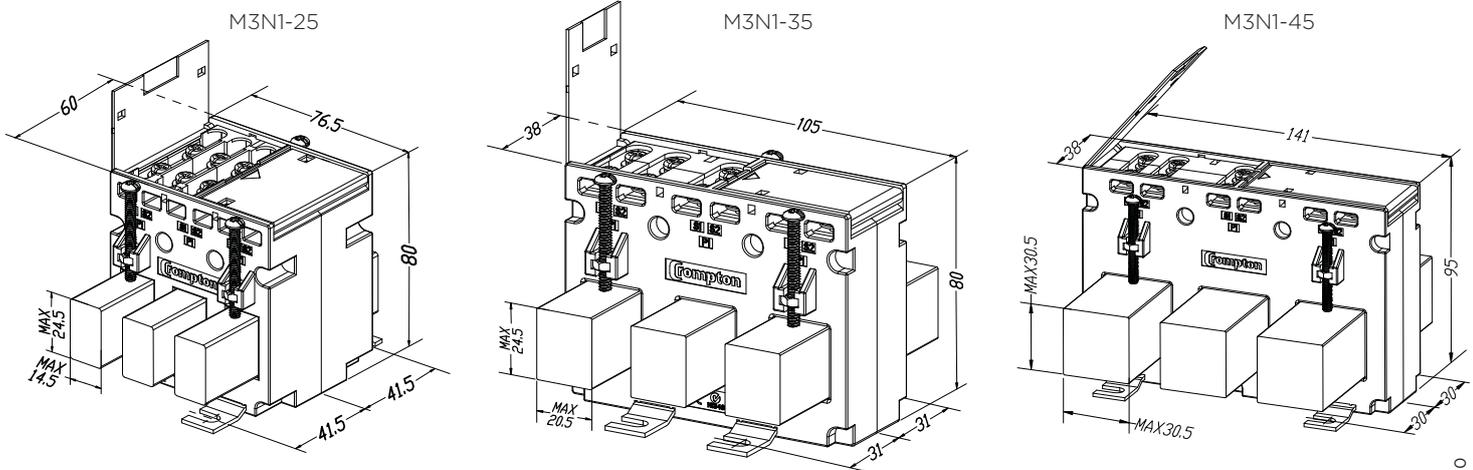

While Tyco Electronics and its affiliates referenced herein have made every reasonable effort to ensure the accuracy of the information contained in this catalogue, Tyco Electronics cannot assure that this information is error free. For this reason, Tyco Electronics does not make any representation or offer any guarantee that such information is accurate, correct, reliable or current. Tyco Electronics reserves the right to make any adjustments to the information at any time. Tyco Electronics expressly disclaims any implied warranty regarding the information contained herein, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. Tyco Electronics' only obligations are those stated in Tyco Electronics' Standard Terms and Conditions of Sale. Tyco Electronics will in no case be liable for any incidental, indirect or consequential damages arising from or in connection with, including, but not limited to, the sale, resale, use or misuse of its products. Users should rely on their own judgement to evaluate the suitability of a product for a certain purpose and test each product for its intended application. TE (logo) and Tyco Electronics are trademarks of the Tyco Electronics group of companies and its licensors. Crompton is a trademark of Crompton Parkinson and is used by Tyco Electronics under a licence. Other Trademarks mentioned herein are the property of their respective owners.

**Energy Division - economical solutions for the electrical power industry: cable accessories, connectors & fittings, electrical equipment, instruments, lighting controls, insulators & insulation enhancement and surge arresters.**

**Tyco Electronics UK Ltd**  
Energy Division  
Freebournes Road  
Witham, Essex CM8 3AH

Phone: +44 (0)870 870 7500  
Fax: +44 (0)870 240 5287  
E-mail: [electrical@tycoelectronics.com](mailto:electrical@tycoelectronics.com)

[www.crompton-instruments.com](http://www.crompton-instruments.com)

 **Tyco Electronics**  
Our commitment. Your advantage.